


HYUNDAI Next Gen IP bullet camera with Smart IR of 30m for outdoor

FEATURES

- HYUNDAI Next Gen IP bullet camera with Smart IR of 30m for outdoor
- 1/3" CMOS of 4MP
- Dual stream
- Compression formats H.265 +, H.265, H.264 +, H.264 and MJPEG
- Resolution up to 4MP at 20ips
- ICR filter
- 0.02 lux F2.0
- 2.8 mm fixed lens (100 °)
- OSD, AWB, AGC, BLC, WDR 120dB, 3D-DNR, ROI, video sensor and privacy masks
- Onvif (S / G), ISAPI
- IP67
- 3AXIS
- 12V DC
- Supports PoE

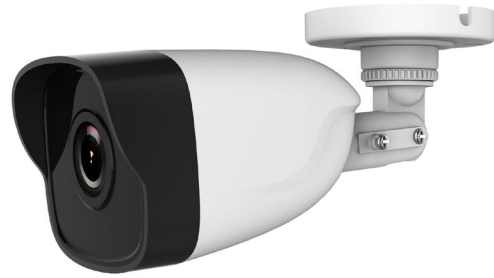

- Power supply: 12V DC (\pm 25%)
- Consumption: 5W, 7W PoE
- Supports PoE + (802.3 af, Class 3)
- -30 ° C ~ + 50 ° C operating temperature
- Humidity: <95% (non-condensing)
- Degree of protection IP67
- Metal and plastic housing
- Dimensions: \varnothing 70 x 172.7 mm
- Weight: 280g
- 3AXIS: 0 ° ~ 360 ° (PAN), 0 ° ~ 180 ° (TILT), 0 ° ~ 360 ° (Rotation)

SPECS

- Image sensor 1/3" 4 megapixel CMOS
- Resolution: 4MP (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 720P (1280x720), VGA (640x480), QVGA (320x240)
- Video compression H.265 +, H.265, H.264 +, H.264 and MJPEG
- Stream 1: 4MP (20 ips), 3MP, 1080P, 720P (25 ips)
- Stream 2: VGA, QVGA (25 ips)
- Day / night mode with removable mechanical filter (ICR)
- 0.0028 lux F2.0 (color)
- Smart IR: 30 meters
- 2.8mm fixed lens
- Viewing angle: 100 ° (H), 55 ° (V), 117 ° (D)
- Imaging modes: BLC, WDR 120dB, 3D-DNR
- Image settings: Saturation, brightness, contrast, sharpness, gain and white balance adjustable through client software or web browser
- Supports video sensor, 1 region of interest (ROI) per stream and privacy mask
- Network interface: RJ45 (10 / 100M) self-adaptive
- Network protocols: TCP / IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6 UDP, Bonjour
- Remote viewing with browsers (IE8 +, Chrome 31.00 ~ 44, Firefox 30.0 ~ 51 and Safari 8.0+) and IOS and Android smartphone
- ONVIF (Profile S / G) and ISAPI compliant
- DDNS compliant
- Up to 32 users
- Up to 6 simultaneous views